PCI Express Card > 2 x Serial with power management

Description

The Delock PCI Express card expands your PC by two external serial ports. The serial ports support a voltage of 5 V and 12 V, which can be set through the jumper. Thus you do not require an additional power supply for the connected devices.

Ref.	89305
EAN	4043619893058
Country of origin	China
Customs tariff number	84733020

Images

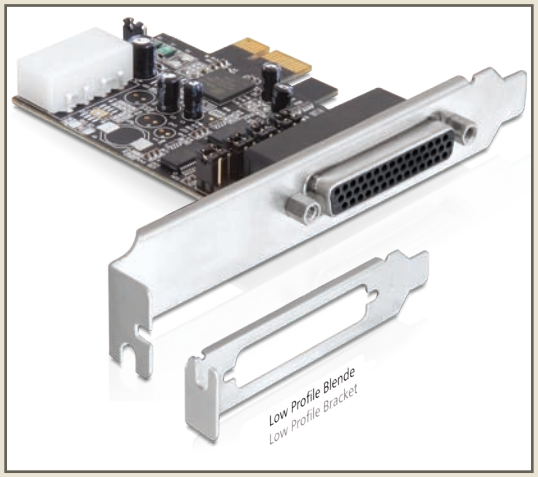

Specification

- Chipset: Oxford OXPCIe952
- Connector: 2 x serial RS-232 DB9 male
  1 x internal power connector 4 pin Molex male
- Serial connector will be lead outside through a cable
- Data transfer rate up to 230.4 Kb/s
- Compatible with 16C950 UART
- FIFO: 128 byte
- ±15KV ESD protection on all signal pins
- 5 V or 12 V voltage can be set individually for each port through the jumper (Pin 1/4/8/9)
- I/O address and IRQ assigned by BIOS
- PCI Express x1, V1.1

System requirements

- Windows XP/XP-64/Vista/Vista-64/7/7-64
- PC with one free PCI Express Slot
- Power supply with a free Molex power connector

Package content

- PCI Express card, 1 serial connecting cable
- Low profile bracket, Driver CD, User manual

Package

- Retail Box

© 2011 by Delock. All names and symbols mentioned here are property of the respective producer.
Printing errors, changes and errors excepted.